




FEATURES

- 5 x 105mm High Digits
- Electromechanical Display
- AC or DC Versions
- Stainless Steel Case
- RS-232C, RS-485, 20mA/TTY
- Configuration by Internal Control Board

SPECIFICATIONS

MODEL	SC-120-SS
Power	100 to 240VAC/DC, 18VA
Operating Temperature	-20°C to 65°C
Display	105mm Digit Height, Reflective Yellow, Bi-State Electromechanical
Selectable Baud Rates	1,200, 2,400, 4,800, 9,600, or 19,200 bps
Enclosure	Stainless Steel
Rating	IP-65

DIMENSIONS

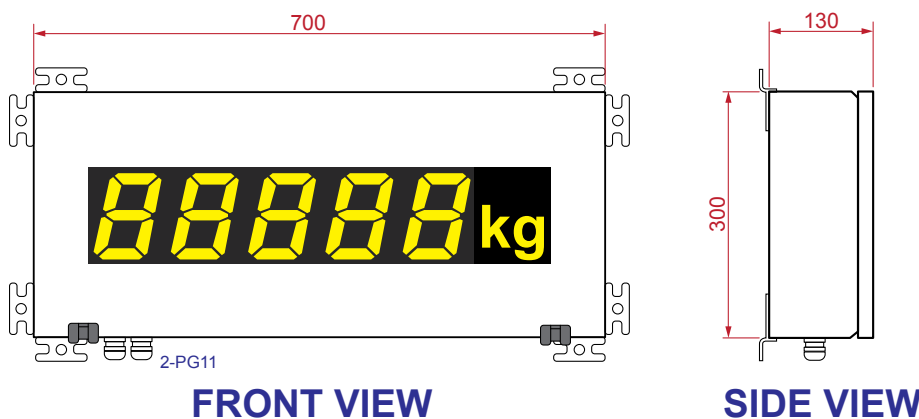

CHARACTER SET

HEX	20	2C	2D	2E	30	31	32	33	34	35	36	37	38	39	3D	41	43	45	46	48	4C	50	55	5D	5F	62	63	64	68	6E	6F	72	75	78	7E	?*
DIGIT		.	-	.	0	1	2	3	4	5	6	7	8	9	-	A	C	E	F	H	L	P	U]	_	b	c	d	h	n	o	r	u	°	±	

* Unknown Character