

SC-120-AL

120mm-HIGH DIGIT, ALUMINIUM-CASE REMOTE DISPLAY




FEATURES

- 6 x 120mm High Digits
- Super-Bright Red LEDs
- AC or DC Versions
- Extruded Aluminium Case
- 10-Level Brightness Control
- RS-232C, RS-485, 20mA/TTY
- Configuration by PC Software via RS-232 Interface

SPECIFICATIONS

MODEL	SC-120-AL
Power	100 to 240VAC/DC, 42VA
Operating Temperature	-20°C to 65°C
Display	120mm Digit Height, Super-Bright Red LEDs
Brightness Control	10-Levels via BCD Switch or Software
Selectable Baud Rates	1,200, 2,400, 4,800, 9,600, or 19,200 bps
Enclosure	Extruded Aluminium
Rating	IP-65

DIMENSIONS

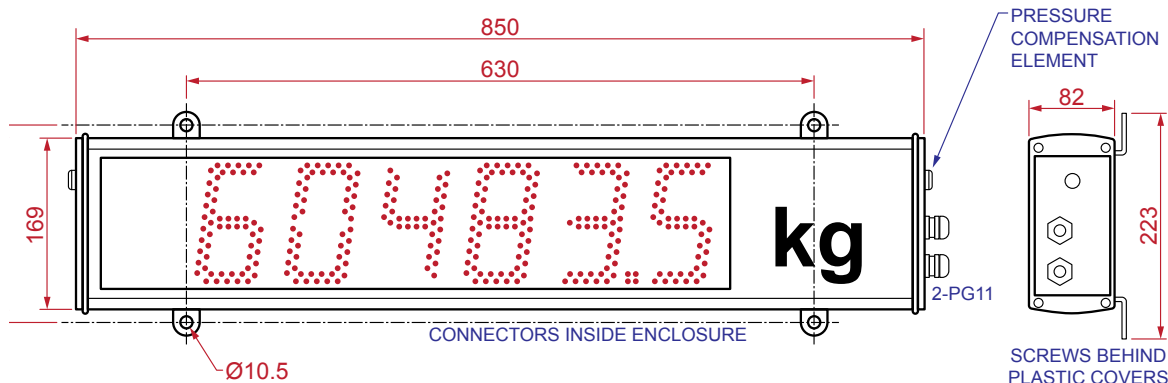

CHARACTER SET

HEX	20	2C	2D	2E	30	31	32	33	34	35	36	37	38	39	3D	41	43	45	46	48	4C	50	55	5D	5F	62	63	64	68	6E	6F	72	75	78	7E	??
DIGIT		.	-	.	0	1	2	3	4	5	6	7	8	9	-	A	C	E	F	H	L	P	U	J	_	b	c	d	h	n	o	r	u	°	1	±

* Unknown Character